


We use cookies to ensure that we can provide you with the best experience on our website. If you continue we assume you consent to receive all cookies from this website. [More Info](#)


Price: Enquire Today

Settings

Continue

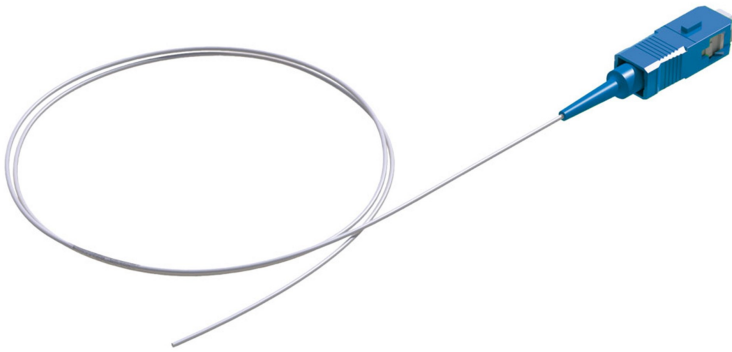

Available in different fibre types
Available with different connector types
Exceed IEC performance requirements
Easy to strip pigtails for on-site installation



Overview

Features

Specification

Our premium low loss range of pigtails are suitable for telecom, datacom, data center and some critical applications. The pigtails provide 900 μ m buffered fibre for ease of handling in fibre management such as panels, splice cassettes and wall boxes.

The pigtails are terminated with premium range physical contact (single mode & multimode) and angled physical contact (single mode) zirconia ferrule connectors which are manufactured with precision factory mounting and polishing techniques which helps assure high transmission quality.

Applications

- Patch panels, wall boxes, ODFs and splice cassettes
- Enterprise
- Datacom
- LAN and WAN
- FTTx
- Broadband network