
Wrapping Tube Cable (VCOOKIE USE ON THIS WEBSITE) Ribbon® (SWR®) We use cookies to ensure that we can provide you with the best experience

on our website. If you continue we assume you consent to receive all cookies from this website. More Info

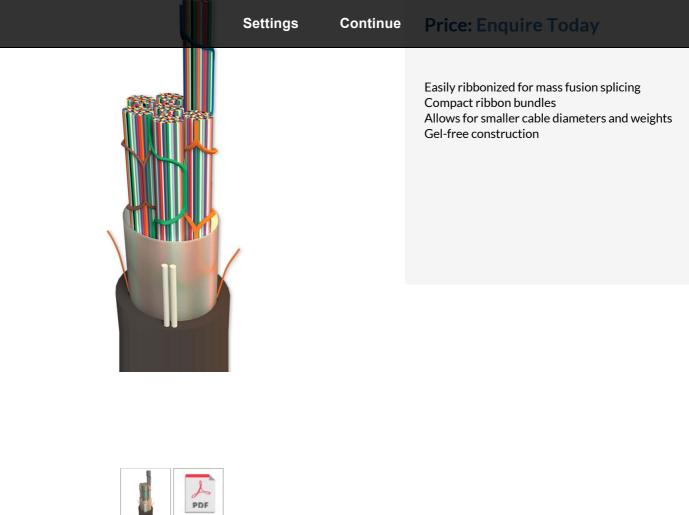

Overview Features Specification

Wrapping Tube Cable (WTC), with SpiderWeb Ribbon® (SWR®), is an ultra highdensity outside plant cable designed specifically for fibre to the home (FTTH) or access markets. It is compliant with the latest issue of the outside plant cable standard, Telcordia GR-20. With an ultra-high density and a new ribbon technology called SpiderWeb Ribbon, WTC provides the smallest cable diameter and lowest weight, high-fibre count ribbon cable in the industry. WTC with SWR cables are available in fibre counts from 144 to 3,456.

SWR® is a bonded fibre ribbon design allowing for either a highly efficient ribbon splicing or an individual fibre breakout splicing process. This flexibility allows for a single cable design to cover a diverse set of applications from access networks to high-fibre count mass fusion splicing. With the ability to roll and conform, the SWR provides for ultra high-density packaging in the WTC.